



- ✧ Single +3.3V Power Supply
- ✧ Monitoring Interface Compliant with SFF-8472
- ✧ Maximum power dissipation <1W
- ✧ Industrial /Extended/ Commercial operating temperature range: -40°C to 85°C/-5°C to 85°C/-0°C to 70°C Version available
- ✧ RoHS compliant and Lead Free

### Features:

- ✧ Up to 1.25Gb/s Data Links
- ✧ Hot-Pluggable
- ✧ Single LC connector
- ✧ Up to 80 km on 9/125µm SMF
- ✧ 1550nm DFB laser transmitter
- ✧ 1490nm PIN photo-detector

### Applications:

- ✧ 1000Base-ZX Ethernet
- ✧ Metro/Access Networks
- ✧ 1×Fibre Channel
- ✧ Other Optical Links

### Description:

OP5480D-54 Bi-Directional Transceivers are a high performance, cost effective module which have a single LC optics interface. They are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA) and Digital diagnostics functions are available via the 2-wire serial bus specified in SFF-8472. The receiver section uses a PIN receiver and the transmitter uses a 1550 nm DFB laser, up to 22dB link budget ensure this module 1000Base-ZX Ethernet 80km application.

#### ● Absolute Maximum Ratings

| Parameter           | Symbol          | Min. | Typical | Max. | Unit |
|---------------------|-----------------|------|---------|------|------|
| Storage Temperature | T <sub>s</sub>  | -40  |         | +85  | °C   |
| Supply Voltage      | V <sub>CC</sub> | -0.5 |         | 4    | V    |
| Relative Humidity   | RH              | 0    |         | 85   | %    |

#### ● Recommended Operating Environment:

| Parameter                  | Symbol             | Min.       | Typical | Max.                | Unit |
|----------------------------|--------------------|------------|---------|---------------------|------|
| Case operating Temperature | T <sub>C</sub>     | Industrial | -40     | 85                  | °C   |
|                            |                    | Extended   | -5      | 85                  | °C   |
|                            |                    | Commercial | 0       | +70                 | °C   |
| Supply Voltage             | V <sub>CC</sub>    | 3.135      |         | 3.465               | V    |
| Supply Current             | I <sub>CC</sub>    |            |         | 250                 | mA   |
| Inrush Current             | I <sub>surge</sub> |            |         | I <sub>CC</sub> +30 | mA   |
| Maximum Power              | P <sub>max</sub>   |            |         | 1                   | W    |

● **Electrical Characteristics**( $T_{OP} = T_c$ ,  $V_{CC} = 3.0$  to  $3.60$  Volts)

| Parameter                         | Symbol         | Min.           | Typical | Max.           | Unit  | Note |
|-----------------------------------|----------------|----------------|---------|----------------|-------|------|
| <b>Transmitter Section:</b>       |                |                |         |                |       |      |
| Input differential impedance      | $R_{in}$       | 90             | 100     | 110            |       |      |
| Single ended data input swing     | $V_{in PP}$    | 200            |         | 1200           | mVp-p |      |
| Transmit Disable Voltage          | $V_D$          | $V_{cc} - 1.3$ |         | $V_{cc}$       | V     | 2    |
| Transmit Enable Voltage           | $V_{EN}$       | $V_{ee}$       |         | $V_{ee} + 0.8$ | V     |      |
| Transmit Disable Assert Time      | $T_{dessert}$  |                |         | 10             | us    |      |
| <b>Receiver Section:</b>          |                |                |         |                |       |      |
| Single ended data output swing    | $V_{out,pp}$   | 300            |         | 800            | mv    | 3    |
| Data output rise time             | $t_r$          |                |         | 150            | ps    | 4    |
| Data output fall time             | $t_f$          |                |         | 150            | ps    | 4    |
| LOS Fault                         | $V_{losfault}$ | $V_{cc} - 0.5$ |         | $V_{CC\_host}$ | V     | 5    |
| LOS Normal                        | $V_{los norm}$ | $V_{ee}$       |         | $V_{ee} + 0.5$ | V     | 5    |
| Power Supply Rejection            | PSR            | 100            |         |                | mVpp  | 6    |
| Deterministic Jitter Contribution | $RX\Delta DJ$  |                |         | 51.7           | ps    | 7    |
| Total Jitter Contribution         | $RX\Delta TJ$  |                |         | 122.4          | ps    |      |

**Note:**

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.
7. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and . DJ.

● **Optical Parameters**( $T_{OP} = T_c$ ,  $V_{CC} = 3.0$  to  $3.60$  Volts)


| Parameter                         | Symbol   | Min. | Typical | Max. | Unit  | Note |
|-----------------------------------|--|------|---------|------|-------|------|
| <b>Transmitter Section:</b>       |  |      |         |      |       |      |
| Center Wavelength                 | $\lambda_c$  | 1530 | 1550    | 1570 | nm    | 1    |
| Spectral Width(-20dB)             | $\sigma$   |      |         | 1    | nm    |      |
| Optical Output Power              | $P_{out}$  | -2   |         | +3   | dBm   | 2    |
| Optical Rise/Fall Time            | $t_r / t_f$  |      |         | 260  | ps    | 3    |
| Extinction Ratio                  | ER   | 9    |         |      | dB    |      |
| Deterministic Jitter Contribution | $TX\Delta DJ$  |      |         | 56.5 | ps    | 4    |
| Total Jitter Contribution         | $TX\Delta TJ$  |      |         | 119  | ps    |      |
| Eye Mask for Optical Output       | Compliant with Eye Mask Defined in IEEE 802.3 standard |      |         |      |       |      |
| Relative Intensity Noise          | RIN  |      |         | -120 | dB/Hz |      |
| <b>Receiver Section:</b>          |  |      |         |      |       |      |
| Optical Input Wavelength          |  | 1470 | 1490    | 1510 | nm    |      |

|   |                  |     |      |                   |      |     |
|---|------------------|-----|------|-------------------|------|-----|
| Optical Input Power                             | P <sub>in</sub>  | -24 |      | -3                | dBm  | 5.6 |
| Receiver Overload                               | P <sub>ol</sub>  |     |      | -3                | dBm  | 5.6 |
| RX Sensitivity                                  | Sen              |     |      | -24               | dBm  | 5.6 |
| RX_LOS Assert                                   | LOS <sub>A</sub> | -34 |      |                   | dBm  |     |
| RX_LOS Deassert                                 | LOS <sub>D</sub> |     |      | -25               | dBm  |     |
| RX_LOS Hysteresis                               | LOS <sub>H</sub> | 0.5 |      |                   | dB   |     |
| <b>General Specifications</b>                   |                  |     |      |                   |      |     |
| Data Rate                                       | BR               |     | 1250 |                   | Mb/s |     |
| Bit Error Rate                                  | BER              |     |      | 10 <sup>-12</sup> |      |     |
| Max. Supported Link Length on 9/125μm SMF@1.25G | LMAX             |     | 80   |                   | km   | 7   |
| Total System Budget                             | LB               | 22  |      |                   | dB   | 8   |

**Note**

1. Also specified to meet curves in FC-PI 13.0 Figures 18 and 19, which allow trade-off between wavelength spectral width.
2. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
3. Unfiltered, 20-80%. Complies with IEEE 802.3 (Gig. E), FC 1x and 2x eye masks when filtered.
4. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and . DJ.
5. Measured with conformance signals defined in FC-PI 13.0 specifications.
6. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-12</sup> BER
7. Dispersion limited per FC-PI Rev. 13

**● Pin Assignment:**

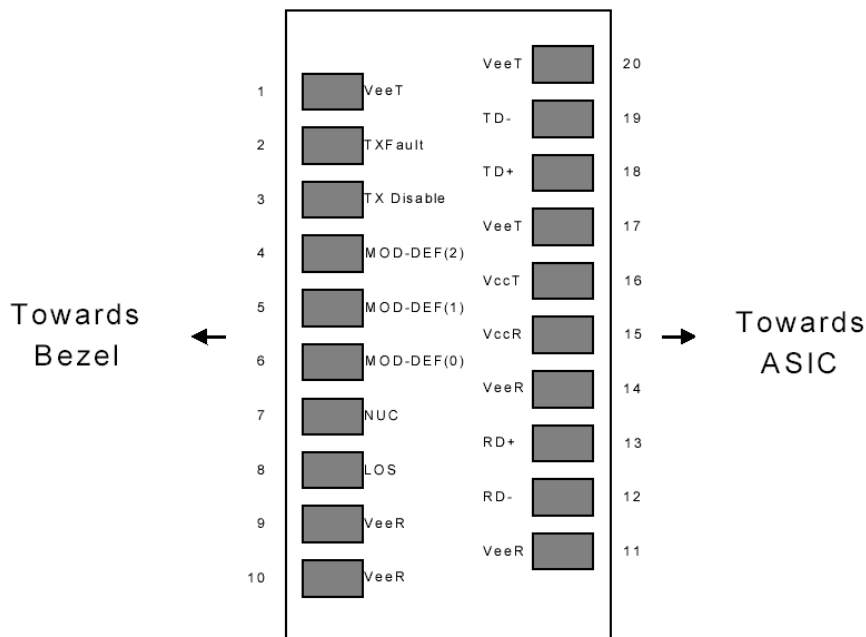

**Figure1:Diagram of Host Board Connector Block Pin Numbers and Names**

**● Pin Description:**

| Pin No | Name       | Function                     | Plug Seq | Notes |
|--------|------------|------------------------------|----------|-------|
| 1      | VeeT       | Transmitter Ground           | 1        | 1     |
| 2      | TX Fault   | Transmitter Fault Indication | 3        |       |
| 3      | TX Disable | Transmitter Disable          | 3        | 2     |

|           |             |                        |          |          |
|-----------|-------------|------------------------|----------|----------|
| <b>4</b>  | MOD-DEF2    | Module Definition      | <b>2</b> | <b>3</b> |
| <b>5</b>  | MOD-DEF1    | Module Definition 1    | <b>3</b> | <b>3</b> |
| <b>6</b>  | MOD-DEF0    | Module Definition 0    | <b>3</b> | <b>3</b> |
| <b>7</b>  | Rate Select | Not Connected          | <b>3</b> | <b>4</b> |
| <b>8</b>  | LOS         | Loss of Signal         | <b>3</b> | <b>5</b> |
| <b>9</b>  | VeeR        | Receiver Ground        | <b>1</b> | <b>1</b> |
| <b>10</b> | VeeR        | Receiver Ground        | <b>1</b> | <b>1</b> |
| <b>11</b> | VeeR        | Receiver Ground        |          | <b>1</b> |
| <b>12</b> | RD-         | Inv. Received Data Out | <b>3</b> | <b>6</b> |
| <b>13</b> | RD+         | Received Data Out      | <b>3</b> | <b>6</b> |
| <b>14</b> | VeeR        | Receiver Ground        | <b>3</b> | <b>1</b> |
| <b>15</b> | VccR        | Receiver Power         | <b>2</b> | <b>1</b> |
| <b>16</b> | VccT        | Transmitter Power      | <b>2</b> |          |
| <b>17</b> | VeeT        | Transmitter Ground     | <b>1</b> |          |
| <b>18</b> | TD+         | Transmit Data In       | <b>3</b> | <b>6</b> |
| <b>19</b> | TD-         | Inv. Transmit In       | <b>3</b> | <b>6</b> |
| <b>20</b> | VeeT        | Transmitter Ground     | <b>1</b> |          |

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

● **SFP Module EEPROM Information and Management**

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h.


The memory is mapped in Table 1.

Detailed ID information (A0h) is listed in Table 2.

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

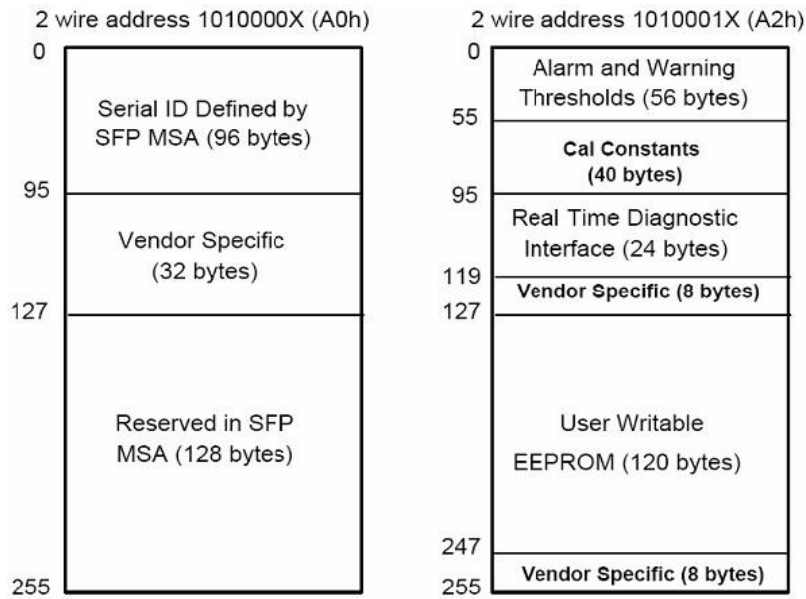

● **Serial ID Memory Contents:**

| Data Address              | Length (Byte) | Name of Length | Description and Contents   |
|---------------------------|---------------|----------------|--|
| <b>Base ID Fields</b>     |               |                |  |
| 0                         | 1             | Identifier     | Type of Serial transceiver (03h=SFP)   |
| 1                         | 1             | Reserved       | Extended identifier of type serial transceiver (04h)   |
| 2                         | 1             | Connector      | Code of optical connector type (07=LC)   |
| 3-10                      | 8             | Transceiver    | Gigabit Ethernet 1000Base-BX   |
| 11                        | 1             | Encoding       | 8B10B (01h)  |
| 12                        | 1             | BR,Nominal     | Nominal baud rate, unit of 100Mbps   |
| 13                        | 1             | Reserved       | (0000h)  |
| 14                        | 1             | Length(9um,km) | Link length supported for 9/125um fiber, units of km   |
| 15                        | 1             | Length(9um)    | Link length supported for 9/125um fiber, units of 100m   |
| 16                        | 1             | Length(50um)   | Link length supported for 50/125um fiber, units of 10m   |
| 17                        | 1             | Length(62.5um) | Link length supported for 62.5/125um fiber, units of 10m   |
| 18                        | 1             | Length(Copper) | Link length supported for copper, units of meters  |
| 19                        | 1             | Reserved       |  |
| 20-35                     | 16            | Vendor Name    | SFP vendor name:   |
| 36                        | 1             | Reserved       |  |
| 37-39                     | 3             | Vendor OUI     | SFP transceiver vendor OUI ID  |
| 40-55                     | 16            | Vendor PN      | Part Number: "OP5480D-54" (ASCII)  |
| 56-59                     | 4             | Vendor rev     | Revision level for part number   |
| 60-61                     | 2             | Wavelength     | Laser wavelength   |
| 62                        | 1             | Reserved       |  |
| 63                        | 1             | CCID           | Least significant byte of sum of data in address 0-62  |
| <b>Extended ID Fields</b> |               |                |  |
| 64-65                     | 2             | Option         | Indicates which optical SFP signals are implemented(001Ah = LOS, TX_FAULT, TX_DISABLE all supported) |
| 66                        | 1             | BR, max        | Upper bit rate margin, units of %  |
| 67                        | 1             | BR, min        | Lower bit rate margin, units of %  |

|                                  |     |                  |  |
|----------------------------------|-----|------------------|--|
| 68-83                            | 16  | Vendor SN        | Serial number (ASCII)                                      |
| 84-91                            | 8   | Date code        | Manufacturing date code                                    |
| 92                               | 1   | Diagnostic Type  | Diagnostics  |
| 93                               | 1   | Enhanced Options | Diagnostics  |
| 94                               | 1   | SFF-8472         | Diagnostics  |
| 95                               | 1   | CCEX             | Check code for the extended ID Fields (addresses 64 to 94) |
| <b>Vendor Specific ID Fields</b> |     |                  |  |
| 96-127                           | 32  | Readable         | Vendor specific date, read only                            |
| 128-255                          | 128 | Reserved         | Reserved for SFF-8079                                      |

### ● Digital Diagnostic Monitor Characteristics

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.


| Data Address | Parameter                        | Accuracy | Unit |
|--------------|----------------------------------|----------|------|
| 96-97        | Transceiver Internal Temperature | ±3.0     | °C   |
| 98-99        | VCC3 Internal Supply Voltage     | ±3.0     | %    |
| 100-101      | Laser Bias Current               | ±10      | %    |
| 102-103      | Tx Output Power                  | ±3.0     | dBm  |
| 104-105      | Rx Input Power                   | ±3.0     | dBm  |

### ● Regulatory Compliance

The FT5480D-54 complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).


|   |  |  |
|---|--|--|
| Electrostatic Discharge (ESD) to the Electrical Pins      | MIL-STD-883E<br>Method 3015.7                                      | Class 1(>1000 V)                       |
| Electrostatic Discharge (ESD) to the Single LC Receptacle | IEC 61000-4-2<br>GR-1089-CORE                                      | Compatible with standards              |
| Electromagnetic Interference (EMI)                        | FCC Part 15 Class B<br>EN55022 Class B (CISPR 22B)<br>VCCI Class B | Compatible with standards              |
| Laser Eye Safety  | FDA 21CFR 1040.10 and 1040.11<br>EN60950, EN (IEC) 60825-1,2       | Compatible with Class 1 laser product. |

● **Recommended Circuit:**

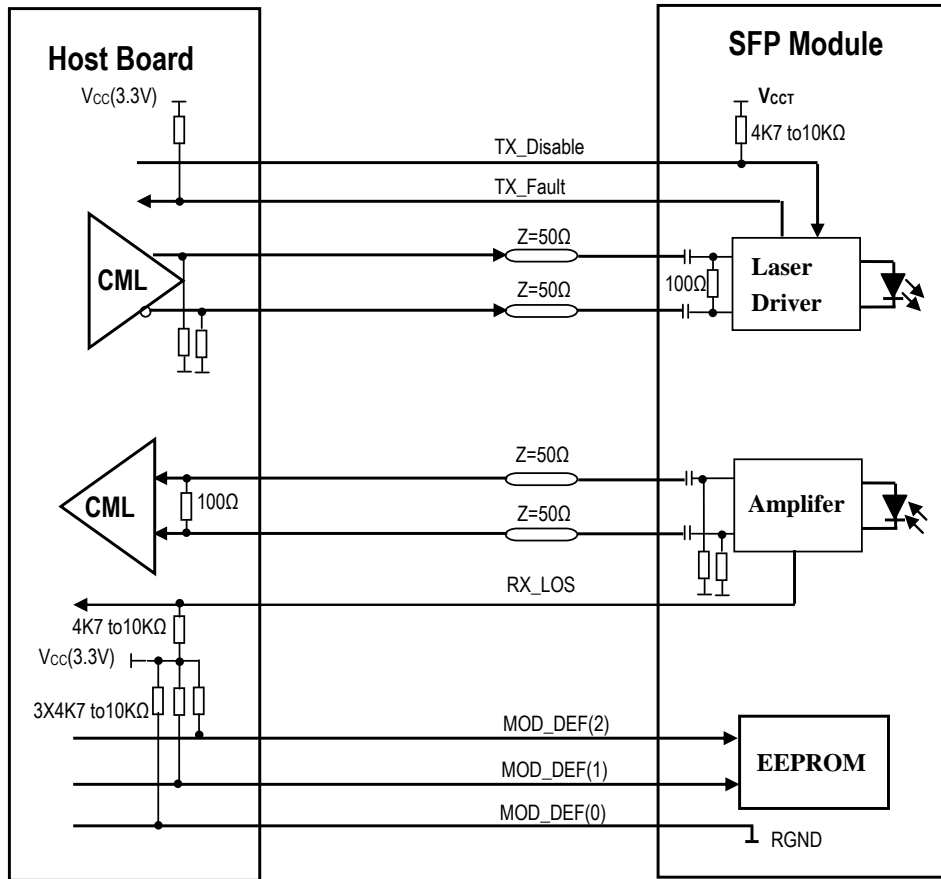

**Figure 2. SFP Host Recommended Circuit**

● **Mechanical Dimensions:**

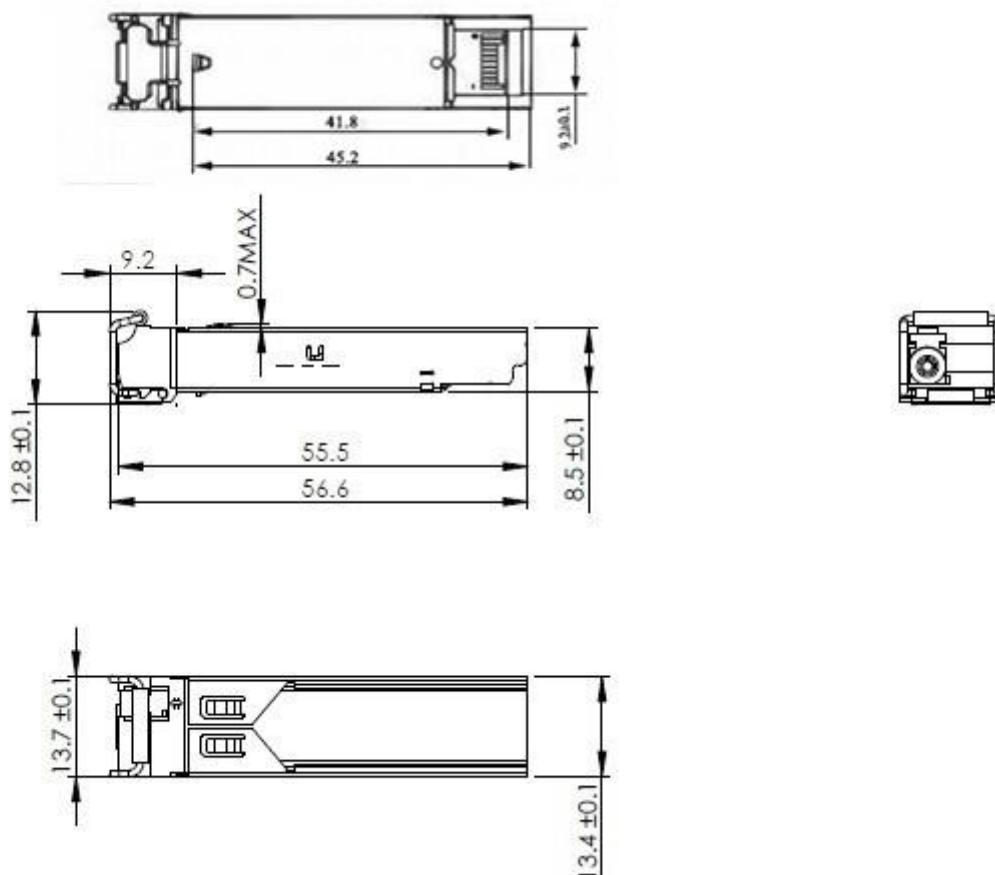

**Figure 3. Mechanical Drawing**

OPWAY reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen OPWAY Communication Co., Ltd.

Copyright © OPWAY

All Rights Reserved